



PCT/GB 2004 / 0 0 1 3 1 6



INVESTOR IN PEOPLE

BEST AVAILABLE COPY

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 10 MAY 2004

I, the undersigned, being an officer duly authorised in accordance with Section 74(3) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Andrew Gersey*  
Dated 26 April 2004

## Patents Form 1/77

Patents Act 1977  
(Rule 16)



07APR03 E197936-1 002835  
P01/7700 0000-0307828-4

THE PATENT OFFICE  
WM  
04 APR 2003  
RECEIVED BY FAX

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference SMR/MAW/P550588
  
2. Patent application number  
(The Patent Office will fill in this part) 0307828.4
  
3. Full name, address and postcode of the or of each applicant (underline all surnames)
 

MILLIKEN INDUSTRIALS LIMITED  
 BEECH HILL PLANT  
 GIDLOW LANE  
 WIGAN WN6 8RN

Patents ADP number (if you know it) 06625024001  
UK

If the applicant is a corporate body, give the country/state of its incorporation
  
4. Title of the invention
 

DUST CONTROL MAT
  
5. Name of your agent (if you have one)
 

URQUHART-DYKES & LORD  
 Midsummer House  
 413 Midsummer Boulevard  
 CENTRAL MILTON KEYNES  
 MK9 3BN

Patents ADP number (if you know it) 1644008 ✓
  
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number
 

Country	Priority application number (if you know it)	Date of filing (day / month / year)
  
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application
 

Number of earlier application	Date of filing (day / month / year)
  
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
 

a) any applicant named in part 3 is not an inventor, or  
 b) there is an inventor who is not named as an applicant, or  
 c) any named applicant is a corporate body.  
 See note (d))

YES

Patents Form 1/77

0065474 04-Apr-03 04-13

9265

1

DUPLICATE

### DUST CONTROL MAT

The present invention relates to a dust control mat, and in particular to one having a high dust capacity. The invention also relates to a method of making such a mat.

Dust control mats are usually placed at the entrances to shops, offices and factories to remove dust and moisture from the feet of pedestrians entering the building. By the term "dust" we mean all kinds of solid particulate dirt, including sand, grit and other contaminants.

- 10 A common dust control mat comprises a tufted pile textile top surface having good moisture and dirt absorbing properties, which is bonded to a backing layer of vulcanised rubber. Various different textile materials are available, including synthetic materials such as high twist nylon and natural fibres such as cotton. These textiles have different performance characteristics. For example, nylon mats have very good dust control
- 15 properties and are hard wearing, but they do not have very good moisture absorbing properties. Cotton mats on the other hand have very good moisture absorbing properties, but have inferior dust control properties and tend to be less durable than nylon mats. Both types of mat have only a limited dust capacity (i.e. they are capable of absorbing only a limited quantity of dust) and they must therefore be cleaned regularly.
- 20 Dust control mats of the type described above are generally washable by immersion and agitation in water. Many such mats are used in the industrial and rental market sectors. Those mats tend to be owned by a laundry, which rents the mats to its clients and regularly replaces soiled mats with clean mats and returns the soiled mats to the laundry for cleaning. Some mats of the same type are also used in the commercial and retail
- 25 sectors, in which case they are generally owned by the end user. Often, those mats are not regularly washed, as the owner does not usually have suitable washing facilities.

When a dust control mat is used in a very dusty or dirty environment, it can quickly become heavily contaminated with dust, thereby reducing its effectiveness and adversely affecting its appearance. For mats used in the industrial and rental market sectors this

30 leads to high laundry costs, whereas for mats used in the commercial and retail sectors,

8265

2

thorough cleaning may rarely or never take place. There is a need therefore for a mat with a high dust capacity, which is relatively easy to clean.

Dust control mats sometimes carry a logo or image. A simple logo can be created by forming the textile surface from a mosaic of tufted materials of different colours.

5 Alternatively, a more complicated pattern or image can be applied to the mat by printing the textile surface. However, because the tufted pile can move during and after printing, the observable resolution of the printed image is very low. In practice, the maximum observable resolution that can be achieved is no higher than about 20dpi (dots per inch). The images that can be printed on the mats are therefore limited to relatively simple  
10 patterns and logos.

It is known to produce a floor mat with a surface that can carry a higher resolution image, such as a photographic image or an advertising message. Such mats are sometimes called poster mats or advertising mats. These mats generally have a textile surface with either no pile or only a very short pile, since a longer pile is not capable of supporting an  
15 image with a high observable resolution. As a result, they generally have poor dust control properties. There is also a need therefore for a mat that is capable of supporting a high resolution image (e.g. with an observable resolution of 75dpi or higher) and that has good dust control properties.

It is also known to provide a highly resilient anti-fatigue mat, for use by workers who have  
20 to spend prolonged periods standing in one position. Such mats generally incorporate foam rubber to provide the necessary resilience. An example is described in WO01/74206.

According to the present invention there is provided a dust control mat having a textile layer and a backing layer, wherein the textile layer includes a spacer fabric having a first  
25 fabric layer that forms the upper surface of the mat, a second fabric layer that forms the lower surface of the textile layer and an intermediate pile layer that interconnects and spaces the first and second fabric layers.

A spacer fabric is a three dimensional fabric, typically having a thickness of 2 to 20 mm, which comprises two plain ground fabric layers and an intermediate pile layer that  
30 interconnects and spaces the two ground fabric layers. Spacer fabrics can be made by warp knitting on a double needlebar Rachel machine. The intermediate pile layer consists

9265

3

of a resilient pile yarn, usually a synthetic monofilament fibre, that extends between the ground fabric layers substantially perpendicular to the faces of the fabric. The intermediate pile layer maintains a substantially uniform separation between the ground fabric layers but is resilient, allowing the spacer fabric to be compressed. Many types of spacer fabric are known, some examples being described in US5385036, US2001/11442, US5817391, US6037035 and US 5896758.

We have found that a spacer fabric provides a highly effective dust control textile, having good dust removal properties and a very large dust capacity. A dust control mat that incorporates a spacer fabric is therefore particularly suitable for use in very dusty environments. The mat can also be cleaned very easily, using a dry mechanical cleaning process (for example, beating, vacuum cleaning or dry tumbling). Further, if washing is required, we have found that the mat drains very well and it can thus be dried with minimal or no tumbling. Cleaning costs are therefore very low.

The mat is also suitable for printing and is capable of carrying a high resolution printed image, owing to the flat and substantially pileless surface of the spacer fabric. It is therefore possible to provide a poster mat that has good dust control properties.

The mat is also highly resilient, providing good anti-fatigue properties, and it is therefore suitable for use by workers who have to stand for prolonged periods in one position.

Advantageously, the first fabric layer comprises a mesh having a number of openings through which dust and dirt can fall into the interior of the textile layer. The openings may have a width of 0.5-10mm, preferably 1-4mm, more preferably 2-3mm. The term "width" as used herein refers to the diameter of a sphere that will pass through the opening. Advantageously, the first fabric layer is a knitted fabric of approximately gauge 11.

The first fabric layer may be made for example of a multifilament yarn, preferably polyester yarn, which provides a very good printing surface, or any other suitable yarn.

Advantageously, the first fabric layer is made of a yarn having a decitex of 100-200, preferably 136-167, more preferably approximately 150.

The second fabric layer preferably has a substantially closed structure with denser construction than the first fabric layer, to prevent rubber or adhesive from entering the

9255

4

spacer fabric when bonding the textile layer to the backing layer. Advantageously, the second fabric layer is a knitted fabric of approximately gauge 22 or higher.

Advantageously, the second fabric layer is made of a multifilament yarn, preferably polyester yarn. Advantageously, the second fabric layer is made of a yarn having a  
5 decitex of 100-200, preferably 136-167, more preferably approximately 150.

The intermediate pile layer may have a thickness of 2-10mm, preferably approximately 4-6mm, to provide a good dust capacity and an appropriate degree of resilience.

Advantageously, the intermediate pile layer is made from a monofilament yarn having a diameter in the range 0.04-3mm, preferably 0.05-0.3mm, more preferably 0.1-0.2mm. We  
10 have found that this provides an appropriate degree of resilience for a floor mat.

Advantageously, the intermediate pile layer is made from a synthetic monofilament yarn, preferably a polyester yarn.

The textile layer may be a warp knit fabric, preferably a Raschel knit fabric.

Advantageously, the backing layer is bonded to the second fabric layer

15 The backing layer may be made of rubber, preferably nitrile rubber. This provides very good stability and resists slipping, creep and curling of the mat. The thickness of the rubber backing layer may be from 0.5mm to 5mm, preferably 0.8mm to 3mm. The rubber backing layer may be vulcanised to the second fabric layer.

The textile layer may be printed, preferably with sublimatic inks. We have found that a  
20 high resolution image may be transferred to the mat using this process. Advantageously, the textile layer is printed with an image having an observable resolution of at least 75dpi. Generally, the textile layer has an area of at least 0.2m<sup>2</sup> (e.g. 40cm x 50cm) and preferably at least 1m<sup>2</sup> or larger.

According to a further aspect of the invention there is provided a method of manufacturing  
25 a dust control mat, the method including the steps of bonding a backing layer to a textile layer that includes a spacer fabric having a first fabric layer, a second fabric layer and an intermediate pile layer that interconnects and spaces the first and second fabric layers.

9285

5

The spacer fabric may be a knitted fabric, preferably a warp-knitted fabric, more preferably a Raschel knit fabric. Advantageously, the first fabric layer comprises a mesh having a number of openings, and the second fabric layer has a substantially closed structure.

The backing layer of rubber is preferably vulcanised to the textile layer in a heated press.

- 5 The textile layer is advantageously printed using a sublimatic printing process, preferably during the backing process.

According to a further aspect of the invention there is provided a dust control mat having a textile layer that includes a spacer fabric having a first fabric layer that forms the upper surface of the mat, a second fabric layer that forms the lower surface of the textile layer  
10 and an intermediate pile layer that interconnects and spaces the first and second fabric layers. Advantageously, the first fabric layer comprises a mesh having a number of openings through which dust and dirt can fall into the interior of the textile layer.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

- 15 Figure 1 is an isometric view of a spacer fabric;

Figure 2 is an isometric view of a mat according to the invention, and

Figure 3 is a side elevation of a mat assembly laid up in a heated press.

The mat shown in figure 2 includes an upper textile layer 1, which is bonded to a lower backing layer 2, for example of vulcanised nitrile rubber. Optionally, the backing layer  
20 may be slightly larger than the textile layer, to provide a rubber border (not shown). The overall size of the mat is typically 85cm x 150cm.

The textile layer 1, which is shown separately in figure 1, comprises a three-dimensional spacer fabric. Such fabrics are well known, some examples being described for instance in US5385036, WO96/32526, US5817391 and US2001/0011442, the entire contents of  
25 which are incorporated by reference herein.

The textile layer 1 is constructed by knitting a three dimensional spacer fabric using a double needlebar warp knitting machine, for example of the Raschel type. This produces a double faced spacer fabric comprising a first fabric layer 3 that in use forms the upper surface of the mat, a second fabric layer 4 that forms the lower surface of the textile layer

9265

6

and is bonded to the backing layer 2, and an intermediate pile layer 5 comprising a resilient pile yarn that interconnects and spaces the first and second fabric layers 3,4 from one another. The intermediate layer 5 is resilient, allowing some compression of the textile layer 1, but restoring the separation of the first and second fabric layers 3,4 when the deforming force is removed.

The first fabric layer 3 preferably has an open mesh or net-like structure, with a plurality of openings 6 that allow dust to fall through the layer into the space between the first and second layers. The openings 6 may for example be roughly square in shape or they may be roughly hexagonal or circular, with a width in the range 0.5-10mm, typically 1-4mm and preferably 2-3mm. The upper surface of the first fabric layer 3 is relatively smooth and very stable, allowing it to support a printed image with a high observable resolution. The first fabric layer may for example consist of a Raschel warp knit fabric, made using course and gauge settings to provide a relatively open structure. For example, the construction of the first fabric layer 3 may be 6 course Atlas at 11 gauge, made of 150 decitex polyester multifilament yarn.

The second fabric layer 4 preferably has a dense and substantially closed structure, to provide a coherent foundation that is suitable for bonding to the backing layer 2. There should not be any significant openings in the fabric layer, to avoid any significant ingress of rubber, glue or other bonding substances into the textile layer during the backing process. For example, the construction of the second fabric layer 4 may be 2 bar, full set 22 gauge, tricot stitch, made of 150 decitex polyester multifilament yarn.

The intermediate pile layer 5 may be made of a monofilament yarn, a multifilament yarn or a combination of monofilament and multifilament yarns. Preferably, it is made of polyester or nylon monofilaments having a diameter of 0.1-0.2mm. For example, the construction of the intermediate pile layer may typically be half set 22 gauge, single bar, 5 needle V, using 0.15mm monofilament. The thickness of the intermediate layer 5 is generally 2-10mm, typically 4-6mm. The intermediate layer 5 has a relatively open structure, to provide a large dust capacity.

The backing layer 2 is made of any suitable material that provides the mat with the necessary stability: i.e. which prevents slipping and excessive creep as the mat is walked on, and causes the mat to lie flat on the floor. Preferably, the backing layer is made of a nitrile rubber, having a thickness of 0.5-5mm, preferably 0.8-3mm. The backing layer may

P650586\$MR1C

4 Apr 2003

0065474 04-Apr-03 04:13



9265

7

be made of solid or foam rubber, or from a sheet of bonded rubber granules. Alternatively, it can be made of any other suitable material, such as PVC or latex.

The mat is manufactured by bonding the textile layer 1 to the backing layer 2. If the backing sheet is made of rubber, the mat can be manufactured by vulcanising a sheet of unvulcanised rubber to the textile layer in a heated press. In the method shown in Figure 3, a mat assembly comprising a textile layer 1 and a sheet of unvulcanised rubber for the backing layer 2 is laid up on a bottom release sheet 7, made for example of PTFE-coated woven glass. A print transfer sheet 8 that has been printed with an image using sublimatic dyes may optionally be placed face down on top of the textile layer 1. A top release sheet 9 is placed on top of the mat assembly, which is then placed in a press that includes a heated metal platen 10 and an inflatable diaphragm 11 secured to an upper plate 12.

The laid-up mat assembly is pressed in the heated press, for example at a temperature of 170°C and a pressure of 30 pounds per square inch, applied for a cycle time of up to twenty minutes. The heat from the press softens and vulcanises the rubber, bonding it to the lower surface of the textile layer 1. At the same time, if a print transfer sheet is used, the heat vaporises the sublimatic dyes, transferring the printed image onto the upper surface of the textile layer.

Once this process has been completed, the mat is removed from the press, the release sheets 7,9 are removed and, if necessary, the edges of the backing layer are trimmed. Optionally, the backing layer 2 may be perforated, to allow the passage of water during a spin drying process.

Alternative manufacturing methods include bonding the textile layer to a backing layer, for example of granulated rubber or PVC, using an adhesive, and coating the lower face of the textile with a suitable backing material such as latex.

We have found that a dust control mat according to the present invention, with a textile layer made of a spacer fabric, provides an audible scraping effect that encourages people to wipe their feet, and is highly efficient at removing dust from the feet of pedestrians. The dust falls through the openings in the first fabric layer and is held between the filaments of the intermediate pile layer.

We have also found that the mat has a much higher dust capacity than a conventional tufted nylon dust control mat. For example, in one test, we compared the absorbency of

4 Apr 2003

P650588SMR1C

0065474 04 Apr 03 04:13

9285

8

the new mat with that of a conventional tufted nylon dust control mat by filling 100cm<sup>2</sup> samples with sand and then weighing the samples, to determine the dust capacity of the mat. The results were as follows:

Regular tufted nylon cut pile mat: 4.17 kg/m<sup>2</sup>

5 Spacer fabric on rubber backing: 8.13 kg/m<sup>2</sup>

It therefore appears from this test that dust capacity of the new mat is approximately double that of the conventional tufted dust control mat.

Further, we have found that the mat is relatively easy to clean. The majority of the dust retained by the mat can be removed simply by beating, shaking or dry tumbling the mat, or by cleaning it with a vacuum cleaner. If necessary, the surface appearance can then be restored, either by washing or by applying a surface cleaner. If the mat is washed, we have found that it dries very quickly and easily, thereby possibly avoiding the need for tumble drying or at least greatly reducing the energy required to dry the mat.

We have also found that the upper surface of the first fabric layer is capable of supporting an image with a high observable resolution, since the upper layer of the spacer fabric is stable and smooth, with virtually no pile.

Various modification of the invention are of course possible, some of which will now be described.

Numerous different kinds of spacer fabric may be used, employing different yarns. The intermediate pile layer may for example be made of a number of synthetic monofilament yarns, including polypropylene, polyethylene, polyester and polyamide yarns. The thickness of the monofilament will depend on the required thickness of the mat: for example a yarn with a thickness of 0.05-0.1mm might be used for a fabric with a thickness of 4-5mm. The monofilament yarns may be all the same material and thickness or, in some circumstances, yarns of different materials and thickness may be used. Alternatively, a multifilament yarn or a combination of monofilament and multifilament yarns may be used. At least some of the yarns making up the intermediate layer may be bowed, to increase the resilience of the textile.

For the first and second outer layers of the spacer fabric, multifilament yarns will generally be used. These may be spun yarns or composite yarns such as core spun yarns, plied

9255

9

yarns or technical yarns. Various natural and synthetic materials may be used including, for example, jute, cotton, polyester and glass. These yarns do not have to be all the same type: a mixture of materials and diameters can be used to provide different characteristics. Further, the yarns of the first and second layers and the intermediate layer may be all the same, or all different.

The yarns may be white, allowing the mat to be printed or dyed, or coloured yarns may be used to produce a single or multi-colour mat. If a printed mat is required, the textile may be printed before, during or after bonding to the backing layer, by any of a variety of suitable printing processes.

A substrate layer, for example of woven or non-woven polyester, may be provided between the textile layer and the backing layer. The edges of the textile layer may optionally be sealed. The mat may have rubber borders or printed "optical" borders, or it may be borderless. The mat may include one or more areas of another fabric, for example a tufted pile fabric or a knitted, woven or non-woven fabric. The upper surface of the textile surface may be sanded, brushed or napped to modify its appearance, feel and dust/moisture control properties. The textile layer may be treated with a hydrophilic agent or a soil release agent.

The backing layer may be made of solid or foam rubber, granulated rubber, PVC, latex or any other suitable material. Alternatively, the backing layer may be omitted and the mat secured in position by some other means, for example by attaching it to the floor or a supporting frame, or using coated fibres for the lower fabric layer.

8265

10

**CLAIMS**

1. A dust control mat having a textile layer and a backing layer, wherein the textile layer includes a spacer fabric having a first fabric layer that forms the upper surface of the mat, a second fabric layer that forms the lower surface of the textile layer and an intermediate pile layer that interconnects and spaces the first and second fabric layers.
2. A dust control mat according to claim 1, in which the first fabric layer comprises a mesh having a number of openings.
3. A dust control mat according to claim 2, in which the openings have a width of 0.5-10mm, preferably 1-4mm, more preferably 2-3mm.
4. A dust control mat according to any one of the preceding claims, in which the first fabric layer is a knitted fabric of approximately gauge 11.
5. A dust control mat according to any one of the preceding claims, in which the first fabric layer is made of a multifilament yarn, preferably polyester yarn.
6. A dust control mat according to claim 5, in which the first fabric layer is made of a yarn having a decitex of 100-200, preferably 136-167, more preferably approximately 150.
7. A dust control mat according to any one of the preceding claims, in which the second fabric layer has a substantially closed structure.
8. A dust control mat according to any one of the preceding claims, in which the second fabric layer is a knitted fabric of approximately gauge 22 or higher.
9. • A dust control mat according to any one of the preceding claims, in which the  
• second fabric layer is made of a multifilament yarn, preferably polyester yarn.
10. A dust control mat according to claim 9, in which the second fabric layer is made of a yarn having a decitex of 100-200, preferably 136-167, more preferably approximately 150.

9265

11

11. A dust control mat according to any one of the preceding claims, in which the intermediate pile layer has a thickness of 2-10mm, preferably approximately 4-6mm.
12. A dust control mat according to any one of the preceding claims, in which the intermediate pile layer is made from a monofilament yarn having a diameter in the range 0.04-3mm, preferably 0.05-0.3mm, more preferably 0.1-0.2mm.
13. A dust control mat according to any one of the preceding claims, in which the intermediate pile layer is made from a synthetic monofilament yarn, preferably polyester yarn.
14. A dust control mat according to any one of the preceding claims, in which the textile layer is a warp knit fabric, preferably a Raschel knit fabric.
15. A dust control mat according to any one of the preceding claims, wherein the backing layer is bonded to the second fabric layer.
16. A dust control mat according to any one of the preceding claims, wherein the backing layer is made of rubber, preferably nitrile rubber.
17. A dust control mat according to claim 16, wherein the thickness of the rubber backing layer is from 0.5mm to 5mm, preferably 0.8mm to 3mm.
18. A dust control mat according to claim 16 or claim 17, in which the rubber backing layer is vulcanised to the second fabric layer.
19. A dust control mat according to any one of the preceding claims, wherein the textile layer is printed.
20. A dust control mat according to claim 19, in which the textile layer is printed with an image having an observable resolution of at least 75dpi.
21. A dust control mat according to any one of the preceding claims, wherein the textile layer has an area of at least 0.2m<sup>2</sup>, preferably at least 1m<sup>2</sup>.
22. A method of manufacturing a dust control mat, the method including the steps of bonding a backing layer to a textile layer that includes a spacer fabric having a first

4 Apr 2003

P550588SMR1C

0065474-04-Apr-03-04-12

9265

12

fabric layer, a second fabric layer and an intermediate pile layer that interconnects and spaces the first and second fabric layers.

23. A method according to claim 22, in which the spacer fabric is a knitted fabric, preferably a warp knitted fabric, more preferably a Rachel knit fabric.
24. A method according to claim 22 or claim 23, in which the first fabric layer comprises a mesh having a number of openings.
25. A method according to claim 24, in which the second fabric layer has a substantially closed structure.
26. A method according to any one of claims 22 to 25, wherein a backing layer of rubber is vulcanised to the textile layer in a heated press.
27. A method according to any one of claims 22 to 26, wherein the textile layer is printed using a sublimatic printing process.
28. A method according to claim 27 when dependent on claim 26, wherein the textile layer is printed during the backing process.
29. A dust control mat having a textile layer that includes a spacer fabric having a first fabric layer that forms the upper surface of the mat, a second fabric layer that forms the lower surface of the textile layer and an intermediate pile layer that interconnects and spaces the first and second fabric layers.


9265

13


**ABSTRACT****DUST CONTROL MAT**

A washable floor mat has a textile layer (1) and a backing layer (2). The textile layer (1) includes a spacer fabric having a first fabric layer (3), a second fabric layer (4) and an intermediate pile layer (5) that interconnects and spaces the first and second fabric layers.

Figure 1

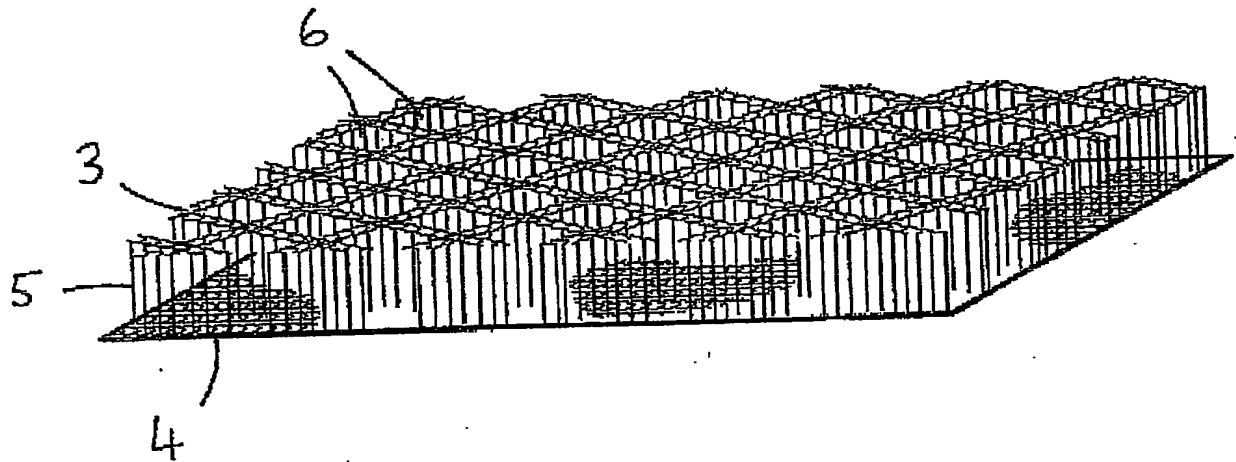

**FIG. -1-**

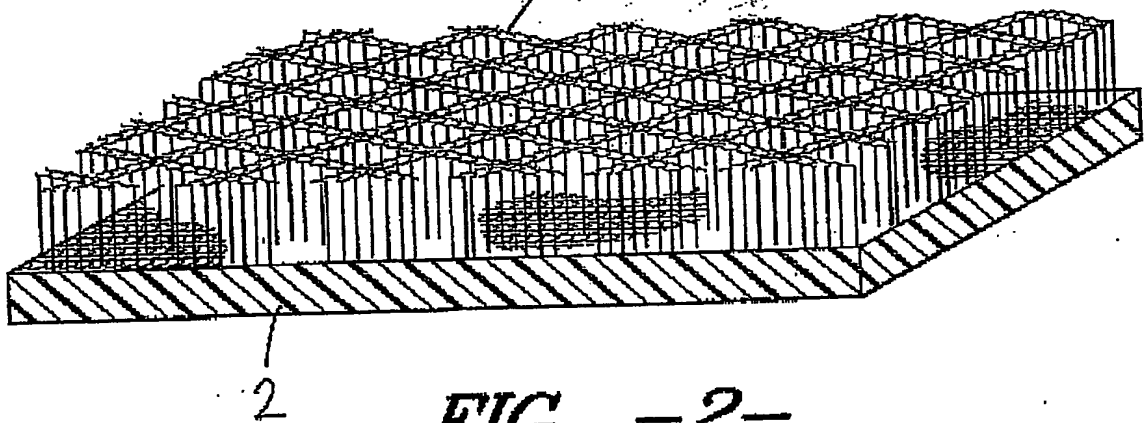

**FIG. -2-**



2/2

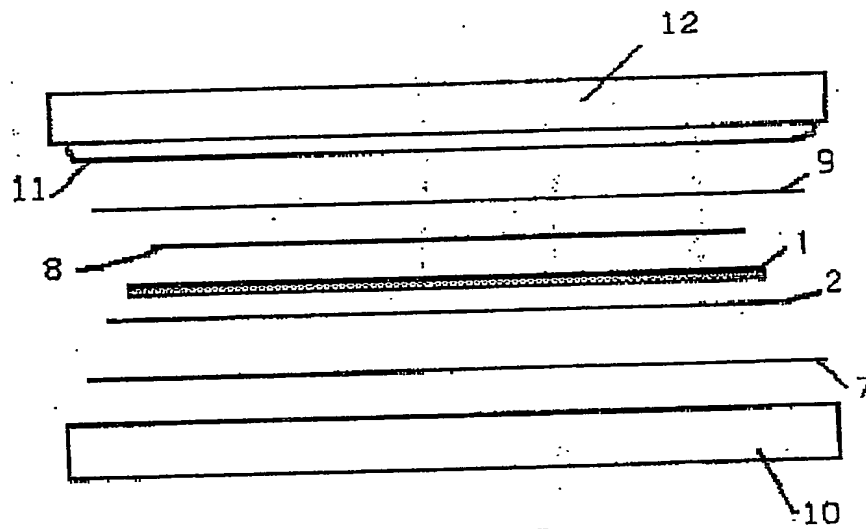


Fig. 3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**